


MONO-CRYSTALLINE INNOVACORE



www.innovativesolarsolutions.in





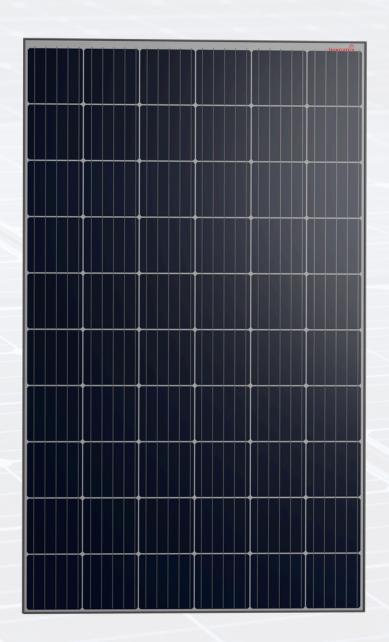






Model INV-M-20-335Wp

Electrical Characteristrics	INV-M-20-335Wp
Peak Power, Pmax (Wp)	335
Open Circuit Voltage, Voc (V)	39.50
Short Circuit Current, Isc (A)	10.60
Voltage at maximum power, Vmp (V)	34.01
Current at maximum power, Imp (A)	9.86
Maximum System Voltage (Vdc)	1500V
Maximum Efficiency (%)	20.57

STC: 1000 W/ M2 IRRADIANCE, 25°C CELL TEMPERATURE, AM 1.5G SPECTRUM

Mechanical Characteristrics	INV-M-20-335Wp	
L x W x D - (mm)	1645 x 990 x 35	
Mounting Hole Pitch (L) - (mm)	1000/750	
Mounting Hole Pitch (W) - (mm)	956	
Weight - (Kg)	16.65	
Cells Per Module	60	
Cell Type	Mono-Crystalline	
Front Cover (Material/ Thickness) Tempered & Low Iron Glass, 3.2 mm		
Encapsulant	Ethylene Vinyl Acetate	
Frame	Anodized Aluminium Alloy	
Junction Box	IP 68/Weatherproof PPO	
Number of Bypass Diodes	3	
Connectors	MC4	
Cable (m)	1	

Mounting Details

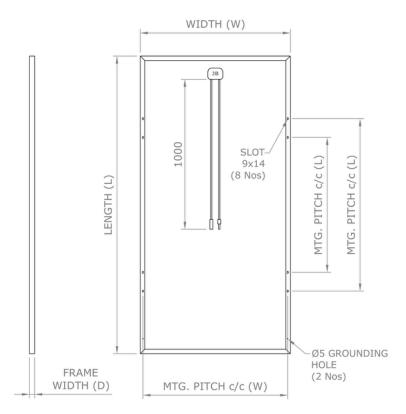



Other characteristics:

Temperature Co-efficients:

Maximum Power Tolerance : $\pm 2\%$

Warrantry:

Product: 10 Years.

Performance: 25 Years (10% of power output for first 10 years and 80% of the power output at the end of 25th year.)

Other points to note:

*As we continuously innovate, research, and improve our products, the specifications in this product information sheet may change without prior notice. Please follow the installation instructions. For more details on approved installation, refer to the installation manual or contact the technical service department.
*Please note that the images in this brochure are for illustrative purposes only. The actual product may differ

*Please note that the images in this brochure are for illustrative purposes only. The actual product may differ in appearance.





102, C' Shed, 2nd Main Road, Machohalli, Bapagrama, Bengaluru, Karnataka 560091

> Ph: +91 63649 25204/ +91 63649 25205 Web: www.innovativesolarsolutions.in Mail: info@innovativesolarsolutions.in